

$\frac{\text{VALVE AND FLOW CONTROL SPECIALISTS}}{\textit{SERVICE AND RELIABILITY}}$

Limit Switch Box




Specifications


| Item.Type | | |
|----------------------|--------------------------------|--|
| Switch Type | Mechanical Switch x2 | |
| Switch Rating | AC:250V 3A,125V 5A | |
| | DC:250V 0.2A,125V | |
| | 0.4A,30V 4A | |
| Enclosure Protection | Weather proof, IP67 / NEMA4&4X | |
| Ambient Temp. | -20℃~80℃ | |
| Conduit Entry | NPT1/2(PT1/2,PF1/2,M20,PG13.5) | |
| Terminal | 8Points | |
| Mouting Bracket | NAMUR VDI / VDE 3845, ISO5211 | |
| Meterial | Aluminum | |
| Weight | 880g(1.94lb) | |

- Visual position indicator.
- Limit switch adjustment cams has spring. Changing cam position is very simple without requiring any tools.
 (close-up, open-down)
- Terminal strip number with 8 contacts is standard for micro-switches.
- Solenoid valve can be connected easily.
- Dual 1/2" conduit entries.
- It is designed to be captive by the cover.
- Can be mounted on any rotary actuator in ISD5211.

Dimension

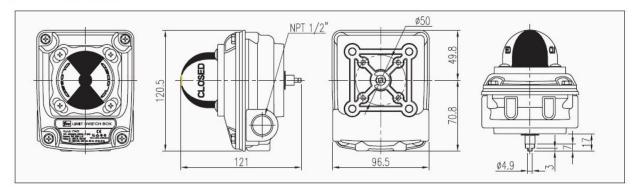

Mounting Bracket



| Model No. | Material | Application |
|-----------|-----------------|-------------------|
| -1 | STAINLESS STEEL | 30 * 130 , H : 30 |