



Diverting – Mixing 3-way Control Valve - Summary




ARI-STEVI® 450 / 451
 with electric and pneumatic actuators

Control valve - 3-way with flanges (3-way mixing valve / 3-way diverting valve)
 DN 15 - 150

ARI-STEVI® 450 / 451

Electric actuator ARI-PREMIO

- Enclosure IP 65
- 2 torque switches
- Handwheel
- Additional devices available, e.g. potentiometer



Page 2





Fig. 450

ARI-STEVI® 450 / 451

Electric actuator AUMA SAR

- Electric multiturn actuator capable of high closing pressures
- Enclosure IP 67
- 2 torque switches
- 2 travel switches
- Handwheel
- Overheating protection for motor as standard
- Additional devices available, e.g. potentiometer
- Explosion proof version available



Page 6


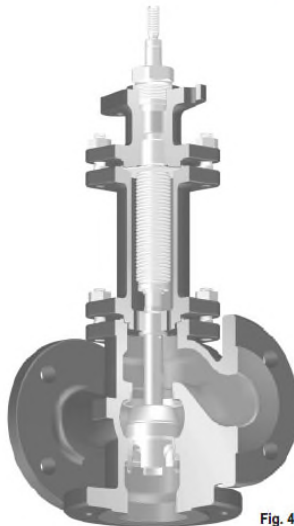


Fig. 451

ARI-STEVI® 450 / 451

Pneumatic actuator ARI-DP

- Reversible pneumatic actuator
- Actuator with rolling diaphragm
- Air supply pressure max. 6 bar
- Stem protection by bellows
- Maintenance-free O-ring sealing
- Assembly of additional devices acc. to DIN IEC 60534-6



Page 14

Features:

- Compact design
- Precision guided stem
- Burnished stem
- Tapered seat ring
- Seat options available
- Reducible kvs-values
- Rangeability 30 : 1
- Guided plug
- Spring loaded PTFE-V ring packing unit
- Two-ply bellows seal as standard
- Travel indicator

For further details please contact your local VCS office ensuring you have all the system requirements or if wishing a refurbishment or direct replacement the appropriate model number etc.