





**VALVE AND FLOW CONTROL SPECIALISTS**  
*SERVICE AND RELIABILITY*

## Bronze Swing Check Valve to AS 1628

### Figure VCK-B2047

A quality industrial non return valve that allows flow in one direction only for pipework in horizontal or vertical applications.

**Size Range:** 15mm through 80mm  
 PN 20 Non shock Cold Working Pressure  
 Working pressure / temp 99 Deg C / 1.7mpa  
 Hydrostatic closure seat tests in Accordance to ISO 5208  
 Body markings comply with AS 1628  
 Pipe threads to BS 21 BSP  
 Designed to AS 1628

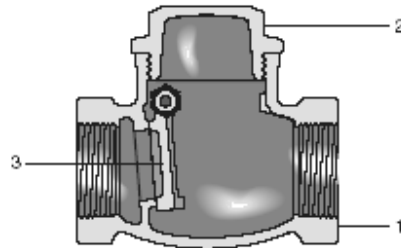

DIMENSIONS MM

Part No	Material
Body (1)	Bronze ASTM B62 C83600
Bonnet (2)	Bronze ASTM B62 C83600
Stem	As 352 / ASTM B16
Disc (3)	Bronze ASTM B62 C83600

Size	L	H
15	53	38
20	57	41
25	65	45
32	75	51
40	78	55
50	98	67
65	132	85
80	162	95

\*\*\*\*\*

NOTE: This is not a DZR brass bodied valve like early versions of AS 1628 standard valves but full ASTM B62 BRONZE

\*\*\*\*\*