


## Aeration and vent valve BE 891

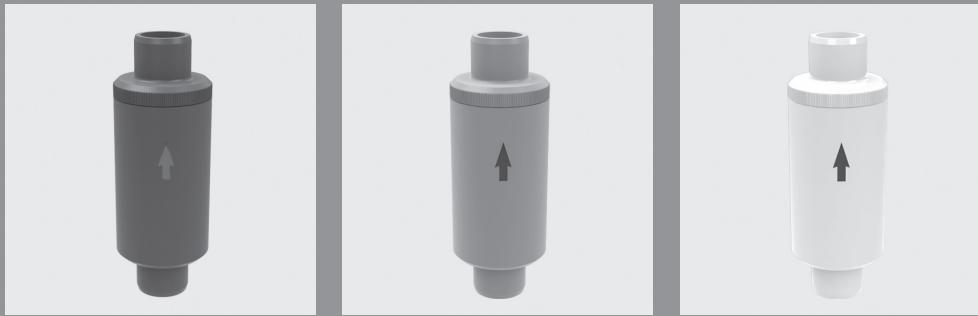

### Advantage

- high level of operating safety and long service life
- low-maintenance
- can be easily connected to the pipework by proven technologies - solvent or fusion welding

### Application

- chemical plants
- water treatment

### Utilisation

- for aerating and venting technical processing plants

### Function

- When fluid is removed from the container, the valve ball/float is located at the bottom of the valve. Air or protective gas can flow into the container, providing pressure compensation to ensure that the container is not damaged by a vacuum.
- When the container is filled, the air/protective gas escapes through the valve into the atmosphere until the fluid level reaches the valve ball/float. When the container is filled further, the valve ball/float rises with the fluid level and seals the container at the valve seat.

### Attention

- Due to the function only vertical mounting is possible!
- When the valve is closed, venting is only possible when the container pressure falls below the atmospheric pressure even with air build-up (outgassing media).
- The valves are not suitable for fluids that clog or gum up the balls/floats, impairing their opening and closing action.

### Flow Media

- Technically pure, neutral or aggressive fluid or gaseous media, provided that the valve components coming into contact with the media are resistant at the operating temperature according to the ASV resistance guide!

### Nominal Pressure ( $H_2O$ , 20°C)

- PN 10

### Fluid Temperature

- see pressure/temperature diagram

### Operating Pressure

- see pressure/temperature diagram

### Size

- DN 10 - DN 50

### Body

- PVC-U
- PP
- PVDF

### Ball

- PP

### Pressure Ring

- PVC-U
- PP
- PVDF

### Sealing

- FPM

### Actuation

- medium controlled

### Connection




- spigot end for solvent welding DIN ISO (PVC-U)
- fusion spigot end DIN ISO (PP)
- fusion spigot end DIN ISO (PVDF)

### Mounting

- vertical mounting only
- observe marking »TOP«!

## Aeration and vent valves, Aeration and vent valve BE 891

### Pressure/temperature diagram

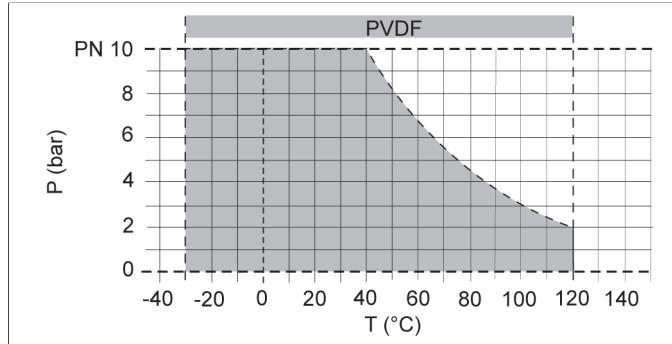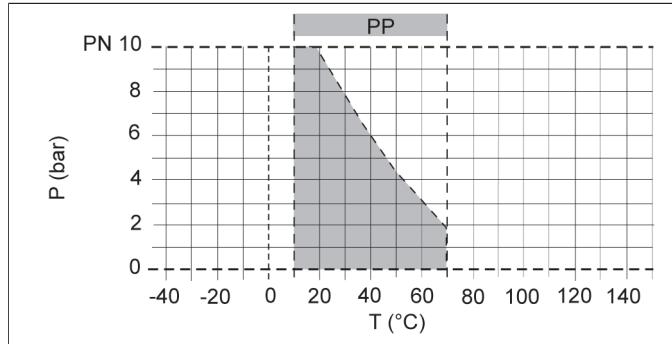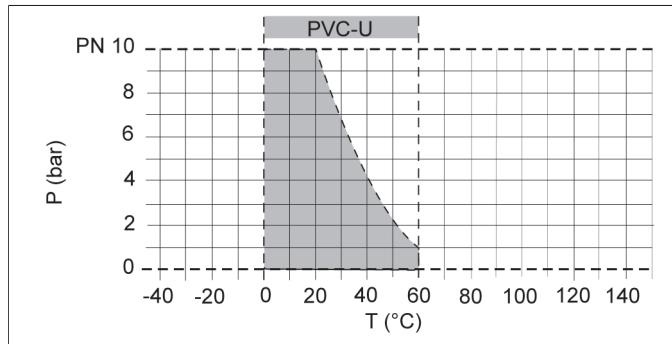

### Operating note

Safe operation of the valve can only be ensured if it is properly installed, operated, serviced or repaired by qualified personnel according to its intended use while observing the accident prevention regulations, safety regulations, relevant standards, directives/technical regulations or codes of practice such as e.g. DIN, DIN EN, DIN ISO and DVS\*. \*DVS = German Welding Society The intended use includes adhering to specified limit values for pressure and temperature, as well as checking the resistance. This requires all components coming into contact with the medium to be "resistant" in accordance with the ASV resistance guide. The use of the valves in tank installations must be checked by the customer with regard to the safety requirements.

Please connect an evacuation line with the aeration/vent valve. In the case of omission there is highest risk of injury due to escaping media.

P = operating pressure

T = temperature

The pressure/temperature limits are applicable for the stated nominal pressures and a computed operating life factor of 25 years. These are standard values for harmless media (DIN 2403), to which the valve material is resistant.

For other media please refer to the ASV resistance guide.

The durability of wear parts depends on the operating conditions of the application.

For temperatures below 0°C (PP < +10°C) please specify the precise operating conditions of the application.

The rated pressure depends on the valve size and material. For the corresponding rated pressure value of the valve, please refer to the »Order table«.

### BE 891 Flow Q

d (mm)	16	20	25	32	40	50	63
Q (Nm <sup>3</sup> /h)	10	14	18	40	60	75	85

Standard values: flow velocity Vair ~ 10-20 m/s

Flow based on air (Nm<sup>3</sup>/h)

## Aeration and vent valves, Aeration and vent valve BE 891



### body PVC-U

size pressure range	d(mm)	16	20	25	32	40	50	63	
	DN(mm)	10	15	20	25	32	40	50	
	DN(inch)	3/8	1/2	3/4	1	1 1/4	1 1/2	2	
	PN(bar)	10	10	10	10	10	10	10	
Connection	sealing	ident No.							
PVC-U spigot end DIN ISO	FPM	54393	54395	54396	54397	54398	54399	54400	
	weight	0.10 kg	0.13 kg	0.19 kg	0.28 kg	0.50 kg	0.70 kg	1.23 kg	

### body PP

size pressure range	d(mm)	16	20	25	32	40	50	63	
	DN(mm)	10	15	20	25	32	40	50	
	DN(inch)	3/8	1/2	3/4	1	1 1/4	1 1/2	2	
	PN(bar)	10	10	10	10	10	10	10	
Connection	sealing	ident No.							
PP spigot end DIN ISO	FPM	55959	54402	55618	54403	60935	56403	65540	
	weight	0.10 kg	0.13 kg	0.19 kg	0.28 kg	0.50 kg	0.70 kg	1.23 kg	

### body PVDF


size pressure range	d(mm)	16	20	25	32	40	50	63	
	DN(mm)	10	15	20	25	32	40	50	
	DN(inch)	3/8	1/2	3/4	1	1 1/4	1 1/2	2	
	PN(bar)	10	10	10	10	10	10	10	
Connection	sealing	ident No.							
PVDF spigot end DIN ISO	FPM	64153	67755	60664	60626	67756	64072	64106	
	weight	0.10 kg	0.13 kg	0.19 kg	0.28 kg	0.50 kg	0.70 kg	1.23 kg	

**Brisbane   Sydney   Melbourne   Darwin**

VALVE AND FLOW CONTROL SPECIALISTS PTY LTD

E-mail      sales@valveandflowcontrolspecialists.com

## Aeration and vent valves, Aeration and vent valve BE 891

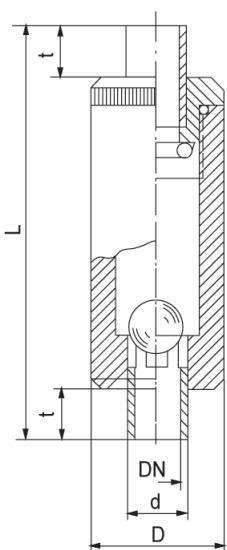

### dimensions

d(mm)	16	20	25	32	40	50	63
DN(mm)	10	15	20	25	32	40	50
DN(inch)	3/8	1/2	3/4	1	1 1/4	1 1/2	2

### dimensions(mm)


D	35	40	45	55	70	80	95
L	114	124	144	154	174	194	224
t	14	16	19	22	26	31	38



## Aeration and vent valves, Aeration and vent valve BE 891

### parts lists

**d16 -d63**

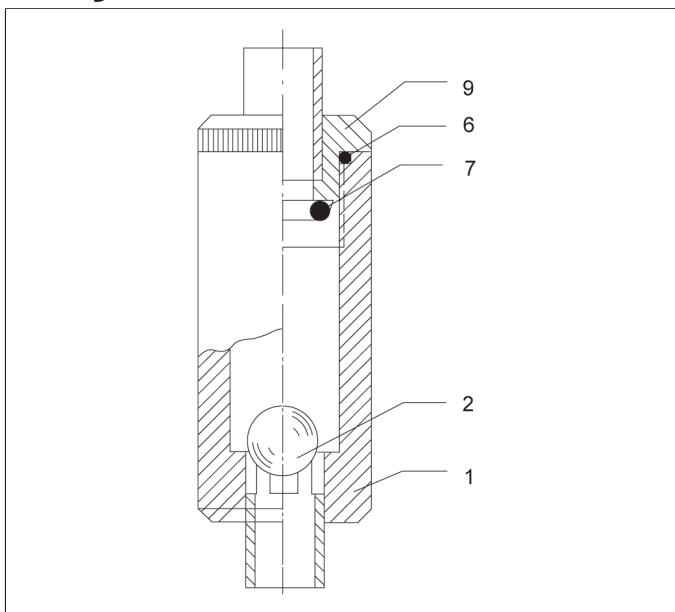

<b>position</b>	<b>quantity</b>	<b>designation</b>
1	1	housing/body
2	1	ball
6	2	O-ring
7	1	O-ring
9	1	bonnet