




**VALVE AND FLOW CONTROL SPECIALISTS**  
*SERVICE AND RELIABILITY*

**EXTENSION SPINDLES – Sluice Valves**  
**Telescopic or fixed-length**

**Materials:**

Square bar & steel pipe	Galvanized steel
Bottom adaptor	Ductile iron, GGG-40, to DIN 1693 (BS 2789 grade 420 - 12 min.)
Spindle cap	Grey cast iron, GG-25, to DIN 1691 (BS 1452 grade 220/250)
Coating	Electrostatically applied epoxy resin to DIN 30677
Protection tube	HDPE
Top cover & Bayonet connector	HDPE
Bolt	Zinc coated steel 8.8
Split	Stainless steel A2

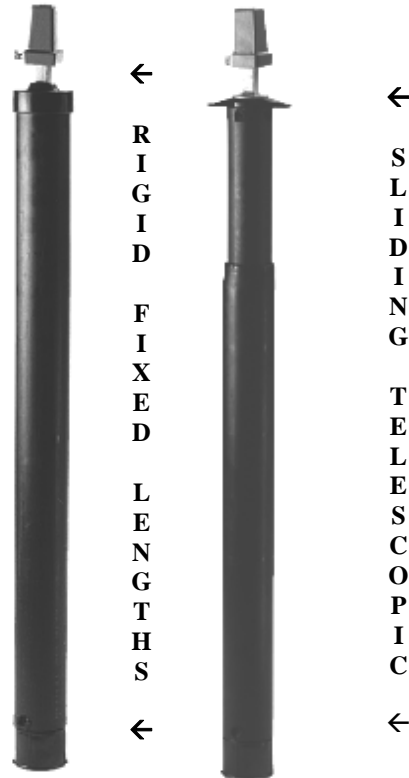

**Fixed-length:**

Ref. nos.	DN	Pipe-cover Lth mm	Cap od mm	Pipe od mm
04-032-0000	25-50	800	27	70
04-032-0100	25-50	1000	27	70
04-032-0200	25-50	1250	27	70
04-032-0300	25-50	1500	27	70
04-032-0400	25-50	2000	27	70
04-032-0500	25-50	3000	27	70

**Telescopic:**

AVK nr.	DN	Actual length mm	Cap mm	Pipe Od mm
04-032-2501	25-50	500-800	16	100
04-032-2601	25-50	700-1200	16	100
04-032-2701	25-50	1100-1700	16	100
04-032-2801	25-50	1700-3000	16	100

**VICTORIA NEW SOUTH WALES QUEENSLAND NORTHERN TERRITORY**  
**VALVE AND FLOW CONTROL SPECIALISTS**

Email [sales@valveandflowcontrolspecialists.com](mailto:sales@valveandflowcontrolspecialists.com)