

GREASE FITTINGS

The DK-LOK® Valve Grease Fitting is manufactured to allow you to inject grease into a valve without affecting the integrity of the operation. DK-LOK® is connecting the world with products that are manufactured to the most stringent industry standards paired with a service and sales network that spans the globe. Our commitment to “quality without compromise” is essential to delivering true value to our clients. In a competitive world that demands reliable products and exceptional customer support, DK-LOK® delivers.


We Connect the World.



AUSTRALIA - Brisbane Sydney Melbourne Darwin Fremantle
VALVE AND FLOW CONTROL SPECIALISTS PTY LTD
E-mail sales@valveandflowcontrolspecialists.com


DK-LOK®

Internal Check

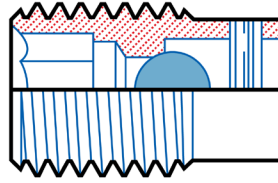


DK-LOK®		Thread Size (inch)	Body Material	Ball Material	Spring Material
VICS-M-4N-S		1/4"	316 SS	A276 440C	Inconel X-750
VICS-M-6N-S		3/8"	316 SS	A276 440C	Inconel X-750

Body Vent Bleeder – (Ball Seat)

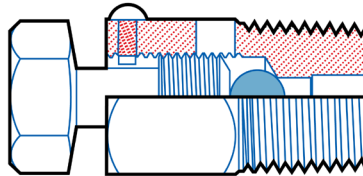

DK-LOK®		Thread Size (inch)	Body Material	Ball Material
VBVT-M-4N-S		1/4" NPT	316 SS	A276 440C
VBVT-M-6N-S		3/8" NPT	316 SS	A276 440C
VBVT-M-8N-S		1/2" NPT	316 SS	A276 440C

Body Vent Bleeder – (Conical Seat)

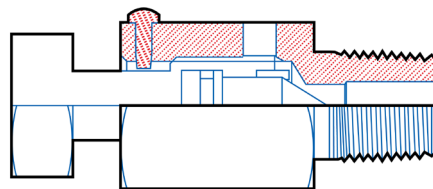


DK-LOK®		Thread Size (inch)	Body Material
VBVT-M-8N4-S		1/2" NPT	316 SS
VBVT-M-12N4-S		3/4" NPT	316 SS
VBVT-M-16N4-S		1" NPT	316 SS

DK-LOK®


AUSTRALIA - Brisbane Sydney Melbourne Darwin Fremantle
 VALVE AND FLOW CONTROL SPECIALISTS PTY LTD
 E-mail sales@valveandflowcontrolspecialists.com

Vented Cap Body with Giant Button Head (for 10k PSI) – (Positive Flow)

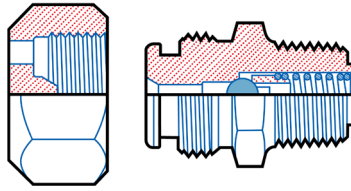


DK-LOK®		Thread Size (inch)	Body Material	Ball Material	Spring Material
VIC-M-4N-BH-S		1/4" NPT	316 SS	A276 440C	Inconel X-750
VIC-M-6N-BH-S		3/8" NPT	316 SS	A276 440C	Inconel X-750
VIC-M-8N-BH-S		1/2" NPT	316 SS	A276 440C	Inconel X-750
VIC-M-12N-BH-S		3/4" NPT	316 SS	A276 440C	Inconel X-750
VIC-M-16N-BH-S		1" NPT	316 SS	A276 440C	Inconel X-750

Vented Cap Body without Giant Button Head (for 10k PSI) – (Positive Flow)

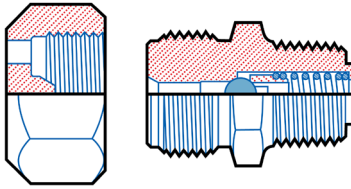

DK-LOK®		Thread Size (inch)	Body Material	Ball Material	Spring Material
VIC-M-8N-S		1/2" NPT	316 SS	A276 440C	Inconel X-750
VIC-M-16N-S		1" NPT	316 SS	A276 440C	Inconel X-750

Packing Injection – (Floating Ball Taper Cavity)

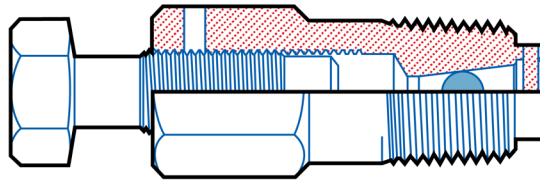

DK-LOK®		Thread Size (inch)	Body Material	Ball Material
VPI-M-4N-S		1/4"	316 SS	A276 440C
VPI-M-6N-S		3/8"	316 SS	A276 440C
VPI-M-8N-S		1/2"	316 SS	A276 440C



WE CONNECT THE WORLD

Tube Fittings / Pipe & Weld Fittings

- Single Ferrule
- Double Ferrule
- Exotic Alloys
- PTFE
- 1/16" - 2"
- 2 mm - 50 mm

Adapters / Hose Products

- SS Hose Barb
- SS JIC
- PTFE Hose Assembly
- Tube Adapters
- ORFS
- Metal Hose Assembly
- Quick Connects
- DIN

Valve Products

- Ball Valves
- Needle Valves
- Manifold Valves
- Relief Valves
- Check Valves
- Block & Bleed Valves
- Tee/Inline Filters
- Gauge Root Valves

Ultra High Purity Products

- Micro-Welds
- Diaphragms
- Bellows
- VCR Metal Face Seals
- High Purity Regulators

High Pressure

- Ball Valves
- Needle Valves
- Pipe Fitting Adapters
- Relief Valves
- Check Valves
- Up to 150,000 PSI

Large Bore Ball Valves

- Trunnions
- Exotic Alloys
- Floating Ball
- Stainless Steel
- Custom
- Up to 56" O.D.

AUSTRALIA - Brisbane Sydney Melbourne Darwin Fremantle
VALVE AND FLOW CONTROL SPECIALISTS PTY LTD
E-mail sales@valveandflowcontrolspecialists.com

VDK-LOK®