



VALVE AND FLOW CONTROL SPECIALISTS
SERVICE AND RELIABILITY

Bronze Flanged Gate Valve

Figure VGA-35E

Gate valve for isolating duties.

Size Range: 15mm through 100mm


1400 kpa Max Non shock Cold Working Pressure

Pipe Flanging to BS 10

Features

- Non-Rising Stem
- Screwed Bonnet
- Flanged ends E undrilled
- Solid Wedge
- Full Ports
- Integral Bronze Seat
- Back seat design

Option VGA-35F 2100 kpa CWP

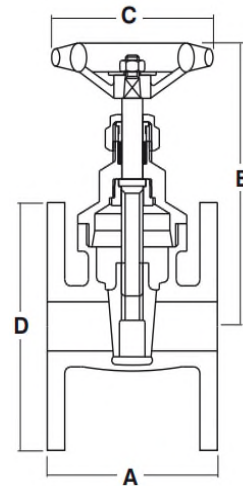

Part No	Material
Body	Bronze
Bonnet	Bronze
Stem	DZR Brass
Wedge	Bronze
Lock nut	Steel
Gland nut	Bronze
Gland	Bronze
Packing	Teflon
Handwheel	Cast Iron
Wheel nut	Bronze
Id plate	Aluminum

DIMENSIONS MM

Size	A	B	C	D	WT KG
15	64	93	50	95	1.8
20	76	105	60	100	2.1
25	86	114	60	115	2.4
32	89	140	67	120	4.1
40	106	147	75	134	4.3
50	114	152	85	150	6.2
65	138	165	110	165	9.5
80	143	185	135	185	14.5
100	179	216	150	216	22.2

NOTE: Gate Valves should not be used for throttling duties. Gate Valves should be fully open or closed. Use a globe valve if throttling is required.

Refer VCK-T4E Flanged bronze swing check valve.

Melbourne Sydney Brisbane Darwin Perth
VALVE AND FLOW CONTROL SPECIALISTS
E-mail sales@valveandflowcontrolspecialists.com