



# Fig. 30QA Stainless Steel - Lever Operated



## FEATURES & BENEFITS

- Robust corrosion resistant stainless steel body integral seating surfaces
- Lever operated for ease of use
- Fitted with asbestos-free gland packing as standard



## MATERIAL SPECIFICATION

Component	Material
Body	316 Stainless Steel *
Wedge	316 Stainless Steel
Lever	316 Stainless Steel
Washer	316 Stainless Steel
Plug	316 Stainless Steel
O-Ring	NBR
Gasket	Fibre



Optional spring for automatic spring assisted closure

## DIMENSIONAL DRAWINGS

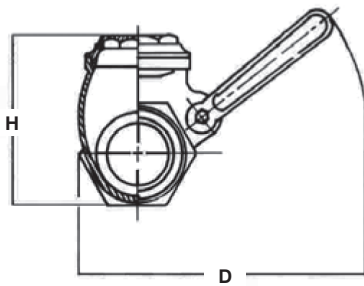

## PRESSURE/ TEMPERATURE RATING

16 bar  
-20°C to +90°C

## SPECIFICATION

Screwed BSP.  
Lever operated.  
316 Stainless Steel to 1 1/2"  
\*304 Stainless Steel 2" to 4".

## DIMENSIONS & WEIGHTS

Nom Size	in	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3
L	mm	46	51	57	61	67	75	80	86
H	mm	57	66	76	88	96	115	150	170
D	mm	130	147	155	184	215	230	355	370
Weight	kg	0.39	0.56	0.78	1.10	1.42	1.62	2.85	3.80

