



VALVE AND FLOW CONTROL SPECIALISTS
SERVICE AND RELIABILITY

Thermowells for HVAC and General Industrial Applications 304 Stainless

FIGURE NO. TW-SPF

A general purpose 304 stainless steel fabricated thermowell to suit 6mm probe.


End Type : Process Connection 15 NB threaded
Materials : 304 Stainless optional 316 stainless

Size Range : Lengths 50mm, 100mm, 150mm, 200mm, 250mm, 300mm, 350mm, 400mm, 500mm

- Note the insertion length is measured from the end of the process connection.

Pressure temp : Max 2mpa 220 Deg C

- For pressure temperatures above this a barstock thermowell is necessary

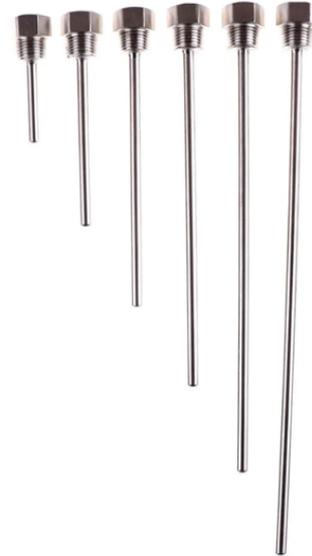

VALVE AND FLOW CONTROL SPECIALISTS Uncontrolled document subject to change without notice

Brisbane Sydney Melbourne Darwin Perth
E-mail sales@valveandflowcontrolspecialists.com