



VALVE AND FLOW CONTROL SPECIALISTS
SERVICE AND RELIABILITY

Basket Strainer Cast Steel ASA 150

FIGURE NO. VBS-C154

Uni cast Body WCB Flanged

End Type : ASA 150 RF Flanged


Materials : WCB Body 304 40 mesh stainless steel screen

Size Range: 50nb to 600nb

- * Larger surface area than Y strainer I
- * F-F Ansi B16.34 flanged to Ansi B16.5 Ansi 150
- * Temperature 0 to 180 Deg C
- * One piece casting not fabricated,
- * Test to API 598
- * **Externally coated**

OPTIONS :

- * Blowdown Valve.

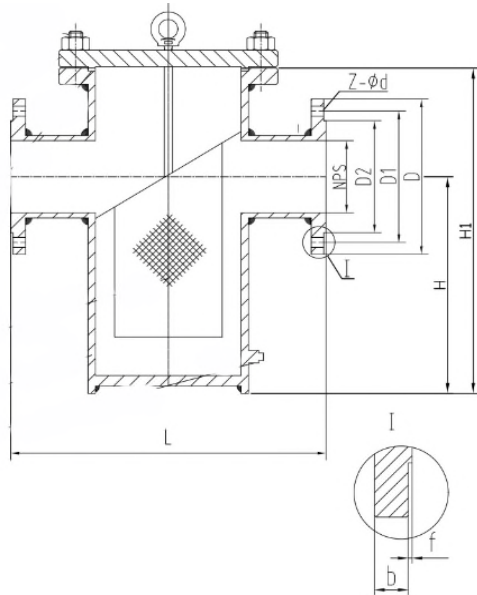

DN	L	H	H1	D	D1	D2	b	f	z-φd
50	270	175	300	150	120.7	92.1	14.3	2	4-19
65	330	210	360	180	139.7	104.8	15.9	2	4-19
80	340	255	400	190	152.4	127	17.5	2	4-19
100	430	300	470	230	190.5	157.2	22.3	2	8-19
125	480	355	550	255	215.9	185.7	22.3	2	8-22
150	500	425	630	280	241.3	215.9	23.9	2	8-22
200	560	500	780	345	298.5	269.9	27	2	8-22
250	660	500	889	405	362	323.8	28.6	2	12-26
300	750	500	785	485	431.8	381	30.2	2	12-26
350	800	550	865	535	476.3	412.8	33.4	2	12-29
400	900	630	980	595	539.8	469.9	35	2	16-29
450	950	820	1200	635	577.9	533.4	38.1	2	16-32
500	1000	850	1240	700	635	584.2	41.3	2	20-32
600	1150	900	1360	815	749.3	692.2	46.1	2	20-35

VCS also has a complete range of actuation to compliment these valves along with strainers, plug, butterfly and check valves.

Uncontrolled document subject to change without notice

Valve & Flow Control Specialists Pty Ltd.

Brisbane - Sydney - Melbourne - Darwin

Email sales@valveandflowcontrolspecialists.com