



**VALVE AND FLOW CONTROL SPECIALISTS**  
*SERVICE AND RELIABILITY*

**Bronze Body Threaded Ball Valve**

**FIGURE NO. VBL-BS30**

**2 Piece Full bore lever operated**

**End Type :** BSP Threaded

**Materials :** Bronze Body LG2 316 SS trim


**Size Range:** ½" to 4" (15nb to 100nb)



- \* 304 SS Handle
- \* Manufacturers Face to Face
- \* Temperature -10 to 180 Deg C
- \* PTFE Stem seals.
- \* PTFE seats.
- \* Test to API 598
- \* **CWP 300 psi**

OPTIONS : NPT Ends

Material Specifications		VCS VBL-BS30
1	Handle	304 Stainless Steel
2	Nut	304 Stainless Steel
3	Gland Nut	Bronze BS:1400 LG2
4	Gland Packing	PTFE
5	Stem Seal	PTFE
6	Seat	PTFE
7	Ball	Stainless Steel AISI 410
8	Body	Bronze BS:1400 LG2
9	Stem	Stainless Steel AISI 410
10	End Cap	Bronze BS:1400 LG2

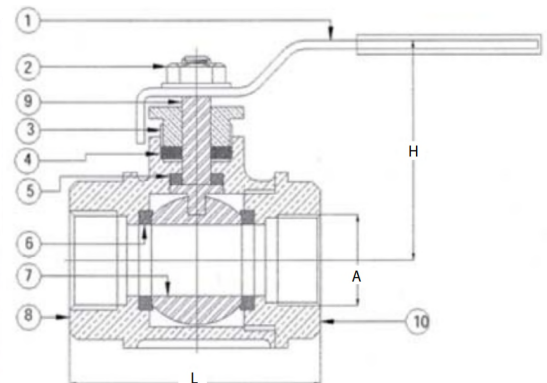

Size	L	H	WT KG
15	60	50	0.4
20	62	55	0.5
25	72	70	0.7
32	85	82	1.1
40	99	92	1.7
50	120	105	2.6
65	142	250	5.6
80	161	280	5.9
100	210	325	8.2

Catalogue drawings are general arrangement only and could be subject to revision. If details are critical refer VCS for certified drawings at time of order.

**BRISBANE SYDNEY MELBOURNE DARWIN**  
VALVE AND FLOW CONTROL SPECIALISTS  
E-mail [sales@valveandflowcontrolspecialists.com](mailto:sales@valveandflowcontrolspecialists.com)